JVC

SERVICE MANUAL

REAR PROJECTION TELEVISION

HD-52G786/C, HD-52G786/R, HD-52G886/C, HD-52G886/R, HD-56G786/C, HD-56G786/R

BASIC CHASSIS
RP3

Supplementary

HD-52G786/C, HD-52G786/R, HD-52G886/C, HD-52G886/R, HD-56G786/C and HD-56G786/R were the models whose SCREEN ASS'Y and some parts were changed based on HD-52G786/B, HD-52G786/Q, HD-52G886/B, HD-52G886/Q, HD-56G786/B and HD-56G786/Q.
Therefore, this service manual describes only the items which differ from those of the HD-52G786/B, HD-52G786/Q, HD-52G886/B, HD-52G886/Q, HD-56G786/B and HD-56G786/Q service manual.
For details other than those described in this manual, please refer to the HD-52G786/B, HD-52G886/B, HD-56G786/B service manual (No.YA293B, 2006/1) HD-52G786/Q, HD-52G886/Q and HD-56G786/Q service manual (No.YA293C, 2006/1).

HOW TO IDENTIFY MODELS

Distinguish names are added at the bottom of the Rating label.

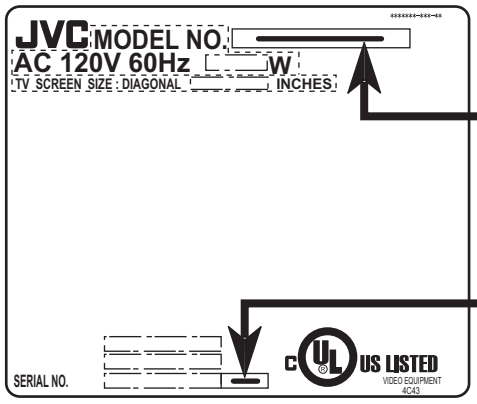

MODEL NAME
HD-52G786
HD-52G886
HD-56G786

DISTINGUISH NAME
CA
RA

COPYRIGHT © 2006 Victor Company of Japan, Limited

No.YA293E
2006/2

USING P.W. BOARD

P.W.B ASS'Y Name	HD-52G886/B	HD-52G886/C	DESCRIPTION
DIGITAL SIGNAL PWB	SRP0D038A-M3	SRP0D038A-M2	Change only in PWB ASS'Y No. (Compatible)

P.W.B ASS'Y Name	HD-52G786/Q HD-52G886/Q HD-56G786/Q	HD-52G786/R HD-52G886/R HD-56G786/R	DESCRIPTION
MAIN DRIVE PWB	SRP-3014A-M2	SRP-3011A-M2	Refer to Parts list (Compatible)
FAN CONTROL PWB	SRP-8107A-M2	SRP-8109A-M2	Change only in PWB ASS'Y No. (Compatible)
TEMP SENSOR PWB	SRP-8207A-M2	SRP-8209A-M2	Refer to Difference list (Compatible)

P.W.B ASS'Y Name	HD-56G786/B	HD-56G786/C	DESCRIPTION
DIGITAL SIGNAL PWB	SRP0D035A-M3	SRP0D035A-M2	Change only in PWB ASS'Y No. (Compatible)

EXPLODED VIEW PARTS LIST-2

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B	HD-52G786/C HD-52G886/C		
	43	LC21931-001A-A	LC21931-001B-A	SPONGE SPACER	(x5)
⚠	58	52SC-002A-M2	52SC-005A-M2	SCREEN ASSY	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/Q HD-52G886/Q	HD-52G786/R HD-52G886/R		
	43	LC21931-001A-A	LC21931-001B-A	SPONGE SPACER	(x5)
	48	LC32619-002B-A	LC33055-003A	52" GLASS MIRROR	
⚠	58	52SC-002A-M2	52SC-005A-M2	SCREEN ASSY	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/B	HD-56G786/C		
	43	LC21931-002A-A	LC21931-002B-A	SPONGE SPACER	(x5)
⚠	58	56ILASC01AM2	55ILASC01AM2	SCREEN ASSY	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/Q	HD-56G786/R		
	43	LC21931-002A-A	LC21931-002B-A	SPONGE SPACER	(x5)
⚠	58	56ILASC01AM2	55ILASC01AM2	SCREEN ASSY	

EXPLODED VIEW PARTS LIST-3

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G886/B	HD-52G886/C		
⚠	204	SRP0D038A-M3	SRP0D038A-M2	DIGITAL SIGNAL PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/Q HD-52G886/Q	HD-52G786/R HD-52G886/R		
⚠	71	LC12307-001A-A	LC12307-001B-A	LAMP COVER	
	72	LC41978-001A-A	---	WASHER	Delete

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/B	HD-56G786/C		
⚠	204	SRP0D035A-M3	SRP0D035A-M2	DIGITAL SIGNAL PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/Q	HD-56G786/R		
⚠	71	LC12307-001A-A	LC12307-001B-A	LAMP COVER	
	72	LC41978-001A-A	---	WASHER	Delete

EXPLODED VIEW PARTS LIST-4

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B HD-56G786/B	HD-52G786/C HD-52G886/C HD-56G786/C		
	120	LC33240-001A-A	LC33240-001B-A	SPACER	
⚠	124	QAR0368-001	QAR0368-002	COOLING FAN	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/Q HD-52G886/Q HD-56G786/Q	HD-52G786/R HD-52G886/R HD-56G786/R		
	120	LC33240-001A-A	LC33240-001B-A	SPACER	
⚠	124	QAR0368-001	QAR0368-002	COOLING FAN	

PRINTED WIRING BOARD PARTS LIST

TEMP SENSOR P.W. BOARD ASS'Y

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/Q HD-52G886/Q HD-56G786/Q	HD-52G786/R HD-52G886/R HD-56G786/R		
		SRP-8207A-M2	SRP-8209A-M2		
	IC2001	LM75CIM-5-X	LM75BIM-5-X	IC	

PACKING PARTS LIST

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B	HD-52G786/C HD-52G886/C		
	3	LC12060-002B-A	---	PAD	Delete
	5	LC12060-001B-A	---	PAD	Delete
	6	LC12429-001A-A	LC12368-001A	CUSHION ASSY	4pcs in 1set
	7	CP30055-007-A	---	SET COVER	Delete
	8	CP30055-A02-A	---	SET COVER	Delete

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/Q HD-52G886/Q	HD-52G786/R HD-52G886/R		
	21	---	LCT2100-001A-A	INST SHEET	Addition

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/B	HD-56G786/C		
	3	LC12426-001A-A	---	PAD	Delete
	5	LC12426-001A-A	---	PAD	Delete
	6	LC12427-001A-A	LC12309-001A	CUSHION ASSY	4pcs in 1set
	7	CP30055-007-A	---	SET COVER	Delete
	8	CP30055-A02-A	---	SET COVER	Delete

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/Q	HD-56G786/R		
	21	---	LCT2100-001A-A	INST SHEET	Addition

PARTS LIST

PRINTED WIRING BOARD PARTS LIST

MAIN DRIVE P.W. BOARD ASS'Y (SRP-3011A-M2)

⚠Ref No.	Part No.	Part Name	Description	Local
IC3101	ASI5100	IC(DILA DRIVER)		
IC3102	K4S161622H-UC60	IC		
IC3103	K4S161622H-UC60	IC		
IC3104	K4S161622H-UC60	IC		
IC3105	K4S161622H-UC60	IC		
IC3161	RC4558D-X	IC		
IC3162	RC4558D-X	IC		
IC3163	RC4558D-X	IC		
IC3201	ASI5100	IC(DILA DRIVER)		
IC3202	K4S161622H-UC60	IC		
IC3203	K4S161622H-UC60	IC		
IC3204	K4S161622H-UC60	IC		
IC3205	K4S161622H-UC60	IC		
IC3206	SN74LVC1G125V-X	IC		
IC3261	RC4558D-X	IC		
IC3262	RC4558D-X	IC		
IC3263	RC4558D-X	IC		
IC3301	ASI5100	IC(DILA DRIVER)		
IC3302	K4S161622H-UC60	IC		
IC3303	K4S161622H-UC60	IC		
IC3304	K4S161622H-UC60	IC		
IC3305	K4S161622H-UC60	IC		
IC3361	RC4558D-X	IC		
IC3362	RC4558D-X	IC		
IC3363	RC4558D-X	IC		
IC3743	CD74HC4053PW-X	IC		
IC3746	SN74LVC541APW-X	IC		
IC3801	JCC5066	IC		
IC3803	K4S643232H-UC60	IC		
IC3892	R1170H251B-X	IC		
IC3901	SI-8011NVS-X	IC		
IC3902	PQ1CY1032Z-W	IC		
IC3903	LM2941S-W	IC		
IC3905	BA50BC0FP-X	IC		
IC3906	PQ20WZ11-X	IC		
Q3702	UN2211-X	TRANSISTOR		
Q3901	UPA2751GR-X	POWER MOS FET		
Q3902	UN2211-X	TRANSISTOR		
Q3903	UN2211-X	TRANSISTOR		
Q3904	2SC3928A/QR/-X	TRANSISTOR		
Q3905	UN2211-X	TRANSISTOR		
Q3906	UN2211-X	TRANSISTOR		
Q3907	IMD14-W	TRANSISTOR		
Q3908	CPH3116-X	CHIP TRANSISTOR		
D3161	MA8056/M/-X	Z DIODE		
D3261	MA8056/M/-X	Z DIODE		
D3361	MA8056/M/-X	Z DIODE		
D3701	STZ6.8N-X	Z DIODE		
D3702	STZ6.8N-X	Z DIODE		
D3703	STZ6.8N-X	Z DIODE		
D3704	STZ6.8N-X	Z DIODE		
D3705	STZ6.8N-X	Z DIODE		
D3706	STZ6.8N-X	Z DIODE		
D3707	STZ6.8N-X	Z DIODE		
D3708	STZ6.8N-X	Z DIODE		
D3741	STZ6.8N-X	Z DIODE		
D3742	STZ6.8N-X	Z DIODE		
D3901	MA111-X	SI DIODE		
D3902	EC30HA03L-X	SB DIODE		
D3903	PTZ3.9B-X	Z DIODE		
D3931	EC30HA03L-X	SB DIODE		
D3932	EC30HA03L-X	SB DIODE		
D3933	PTZ6.8B-X	Z DIODE		
D3935	MA8043/L/-X	Z DIODE		
D3936	MA8043/L/-X	Z DIODE		
D3937	MA111-X	SI DIODE		
C3008	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3101	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3104	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3105	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3106	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3107	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3108	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3109	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3110	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3111	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3112	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3113	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3114	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3121	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3122	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3123	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3124	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3125	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3126	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3127	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3128	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3129	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3130	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3131	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3132	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3141	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3142	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3143	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3144	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3145	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3146	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3147	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3148	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3149	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3150	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3151	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3152	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3162	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3164	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3165	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3166	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3167	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3168	NCB21AK-105X	C CAPACITOR	1uF 10V K	
C3169	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3170	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3171	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3172	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3191	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3192	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3193	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3195	NEHL1CM-476X	E CAPACITOR	47uF 16V M	
C3196	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3197	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	
C3198	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3199	NEHL1CM-106X	E CAPACITOR	10uF 16V M	
C3201	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3202	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C3203	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C3204	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3205	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3206	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3207	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3208	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3209	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3210	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3211	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3212	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3213	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3214	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3215	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3221	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3222	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3223	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3224	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3225	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3226	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3227	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3228	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3229	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3230	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3231	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3232	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3241	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3242	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3243	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3244	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3245	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3246	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3247	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3248	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C3249	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	

⚠Ref No.	Part No.	Part Name	Description Local
C3250	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3251	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3252	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3262	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3264	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3265	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3266	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3267	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3268	NCB21AK-105X	C CAPACITOR	1uF 10V K
C3269	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3270	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3271	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3272	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3291	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3292	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3293	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3295	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3296	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3297	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C3298	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3299	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3301	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3304	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3305	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3306	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3307	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3308	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3309	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3311	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3312	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3313	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3314	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3321	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3322	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3323	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3325	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3326	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3327	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3328	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3329	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3330	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3331	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3332	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3341	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3342	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3343	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3344	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3345	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3346	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3347	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3348	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3349	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3351	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3352	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3362	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3364	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3365	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3366	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3367	NCB21AK-105X	C CAPACITOR	1uF 10V K
C3368	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3369	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3370	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3371	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3372	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3391	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3392	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3393	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3395	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3396	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3397	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C3398	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3399	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3701	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3702	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3703	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3704	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C3706	NDC31HJ-3R0X	C CAPACITOR	3pF 50V J
C3707	NDC31HJ-3R0X	C CAPACITOR	3pF 50V J
C3708	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3709	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3710	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3711	NDC31HJ-471X	C CAPACITOR	470pF 50V J
C3712	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C3713	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C3741	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3742	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3743	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3746	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3747	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C3748	NDC31HJ-101X	C CAPACITOR	100pF 50V J
C3749	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C3801	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3802	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3803	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3804	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3805	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3806	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3807	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3808	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3809	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3810	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3811	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3812	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3813	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3814	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3815	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3816	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3817	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3818	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3820	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3821	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3823	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3824	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3826	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3827	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3833	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C3834	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C3838	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3839	NBE50JM-107X	TA E CAPACITOR	100uF 6.3V M
C3840	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3841	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3842	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3861	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3862	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3863	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3864	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3865	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3866	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3867	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3868	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3869	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3870	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3871	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3872	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3873	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3874	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3891	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3892	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3901	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C3902	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C3903	NDC31HJ-102X	C CAPACITOR	1000pF 50V J
C3904	NDC31HJ-221X	C CAPACITOR	220pF 50V J
C3905	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C3906	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C3907	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C3908	NCB31HK-272X	C CAPACITOR	2700pF 50V K
C3909	NCB11AK-475X	C CAPACITOR	4.7uF 10V K
C3910	NCB11AK-475X	C CAPACITOR	4.7uF 10V K
C3911	NBZ0010-396X	SP E CAPACITOR	39uF
C3912	NBZ0007-107X	SP E CAPACITOR	100uF
C3913	NEHM0JM-476X	E CAPACITOR	47uF 6.3V M
C3931	NBZ0010-396X	SP E CAPACITOR	39uF
C3932	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
C3933	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C3934	NELA1AM-157X	E CAPACITOR	150uF 10V M
C3936	NEHM1CM-476X	E CAPACITOR	47uF 16V M
C3941	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C3942	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C3951	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3952	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3953	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3954	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3958	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3959	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3960	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3961	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3965	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3966	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3967	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3968	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3969	NEHL1CM-106X	E CAPACITOR	10uF 16V M
C3970	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3971	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z
C3972	NEHL1CM-476X	E CAPACITOR	47uF 16V M
C3973	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z

⚠Ref No.	Part No.	Part Name	Description	Local
C3974	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
C3975	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	
R3006	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3010	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3018	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3020	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3021	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3046	NRZ0080-0R0X	NET RESISTOR	0Ω	
R3047	NRZ0080-0R0X	NET RESISTOR	0Ω	
R3048	NRZ0080-0R0X	NET RESISTOR	0Ω	
R3102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3103	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3104	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3105	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3106	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3107	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3111	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3114	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3115	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3116	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3117	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3118	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3119	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3121	NQR0271-001X	EMI FILTEROR		
R3122	NQR0271-001X	EMI FILTEROR		
R3123	NQR0271-001X	EMI FILTEROR		
R3124	NQR0271-001X	EMI FILTEROR		
R3125	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3126	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3127	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3129	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3130	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3131	NQR0271-001X	EMI FILTEROR		
R3132	NQR0271-001X	EMI FILTEROR		
R3133	NQR0271-001X	EMI FILTEROR		
R3134	NQR0271-001X	EMI FILTEROR		
R3135	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3137	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3143	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3144	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3145	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3146	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3147	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3151	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3152	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3153	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3154	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3161	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3162	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3163	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3165	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3166	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3167	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3168	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3169	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3170	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3171	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3181	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R3184	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3185	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3186	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3187	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3188	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3189	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3190	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3191	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3192	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3196	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3197	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3198	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3199	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3201	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
R3202	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3203	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3204	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3205	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3206	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3207	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3210	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3211	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3212	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3213	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3214	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3215	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3216	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3217	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3218	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3219	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3221	NQR0271-001X	EMI FILTEROR		
R3222	NQR0271-001X	EMI FILTEROR		
R3223	NQR0271-001X	EMI FILTEROR		
R3224	NQR0271-001X	EMI FILTEROR		
R3225	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3226	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3227	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3228	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3230	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3231	NQR0271-001X	EMI FILTEROR		
R3232	NQR0271-001X	EMI FILTEROR		
R3233	NQR0271-001X	EMI FILTEROR		
R3234	NQR0271-001X	EMI FILTEROR		
R3237	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3242	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3243	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3244	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3245	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3246	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3247	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3251	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3252	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3253	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3254	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3255	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3256	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3257	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3261	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3262	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3263	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3265	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3266	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3267	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3268	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3269	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3270	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3271	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3281	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D	
R3284	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3285	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3286	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3287	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3288	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D	
R3289	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3290	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3291	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3292	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R3296	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3297	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3299	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3302	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3303	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D	
R3304	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3305	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R3306	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D	
R3307	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D	
R3311	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R3312	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3313	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3314	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3315	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3316	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3317	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3318	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3319	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3321	NQR0271-001X	EMI FILTEROR		
R3322	NQR0271-001X	EMI FILTEROR		
R3323	NQR0271-001X	EMI FILTEROR		
R3324	NQR0271-001X	EMI FILTEROR		
R3325	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3326	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3327	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3328	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3329	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R3330	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R3331	NQR0271-001X	EMI FILTEROR		
R3332	NQR0271-001X	EMI FILTEROR		
R3333	NQR0271-001X	EMI FILTEROR		
R3334	NQR0271-001X	EMI FILTEROR		
R3335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	

⚠Ref No.	Part No.	Part Name	Description Local
R3337	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3341	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3342	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3343	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3344	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3345	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J
R3346	NRSA63D-181X	MG RESISTOR	180Ω 1/16W D
R3347	NRSA63D-151X	MG RESISTOR	150Ω 1/16W D
R3351	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3352	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3353	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3354	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3362	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3363	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3365	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3366	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3367	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3368	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3369	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D
R3370	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3371	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D
R3381	NRSA63D-302X	MG RESISTOR	3kΩ 1/16W D
R3384	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3385	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D
R3386	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3387	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3388	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D
R3389	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3390	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3391	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3392	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3396	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3397	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3398	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3399	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J
R3701	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3702	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3703	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3704	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3705	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4
R3706	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J
R3707	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4
R3708	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3709	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4
R3710	NRZ0040-101X	NET RESISTOR	100Ω 1/16W J x4
R3711	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3712	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3714	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3715	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3716	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
R3717	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
R3718	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3719	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3720	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3721	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3722	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3723	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3724	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3725	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3726	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3727	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3728	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3730	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3733	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3736	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3737	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3738	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3739	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3741	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3742	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J
R3743	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3744	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3745	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3746	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3747	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3748	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3749	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3750	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3751	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3752	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3754	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3755	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3756	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3757	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3758	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3759	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3764	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3765	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3768	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3769	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3783	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3798	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3801	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3802	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3803	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3804	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3805	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3806	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3807	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3808	NRZ0040-100X	NET RESISTOR	10Ω 1/16W J x4
R3809	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4
R3810	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4
R3811	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4
R3812	NRZ0040-0R0X	NET RESISTOR	0Ω 1/16W J x4
R3813	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3814	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3815	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3816	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3817	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3818	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3819	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3820	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3821	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3822	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3823	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3824	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3825	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3826	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3827	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3832	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3835	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3836	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3839	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3840	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3841	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3846	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3849	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3865	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3866	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3867	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3869	NRSA63D-203X	MG RESISTOR	20kΩ 1/16W D
R3872	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3874	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3875	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3876	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3877	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3878	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R3879	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D
R3883	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3884	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3885	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3888	NRSA63D-203X	MG RESISTOR	20kΩ 1/16W D
R3889	NRSA63D-750X	MG RESISTOR	75Ω 1/16W D
R3890	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3895	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3896	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3898	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3901	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3902	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
R3903	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R3904	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R3905	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R3906	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D
R3908	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J
R3909	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3910	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R3911	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
R3912	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J
R3913	NRZ0075-R005X	MP RESISTOR	0.005Ω
R3917	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
R3918	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R3931	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3932	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R3933	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D
R3934	NRSA63D-822X	MG RESISTOR	8.2kΩ 1/16W D
R3935	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D
R3939	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R3951	NRSA63D-561X	MG RESISTOR	560Ω 1/16W D
R3952	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D
R3953	NRSA63D-102X	MG RESISTOR	1kΩ 1/16W D
R3954	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3960	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3968	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R3969	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R3970	NRSA63D-202X	MG RESISTOR	2kΩ 1/16W D
R3971	NRSA63D-471X	MG RESISTOR	470Ω 1/16W D

⚠Ref No.	Part No.	Part Name	Description	Local
R3972	NRSA63J-330X	MG RESISTOR	33Ω 1/16W J	
R3977	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3978	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3979	NRS12BJ-0R0W	MG RESISTOR	0Ω 1/2W J	
R3981	NRS12BJ-102W	MG RESISTOR	1kΩ 1/2W J	
R3982	NRS12BJ-102W	MG RESISTOR	1kΩ 1/2W J	
R3983	NRS12BJ-471W	MG RESISTOR	470Ω 1/2W J	
R3990	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R3991	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3992	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	
R3993	NRS12BJ-1R0W	MG RESISTOR	1Ω 1/2W J	
R3995	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R3996	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R3997	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R3998	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
L3701	NQL092K-2R2X	COIL	2.2uH K	
L3901	NQLB3EN-100X	COIL	10uH N	
L3902	NQL52EN-4R7X	COIL	4.7uH N	
L3931	NQL63EM-101X	COIL	100uH M	
L3932	NQL52EN-4R7X	COIL	4.7uH N	
CN302	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
CN303	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
CN304	QGF0401F1-80W	CONNECTOR	FFC/FPC (1-80)	
EF3004	NQR0504-001X	EMI FILTER		
EF3005	NQR0504-001X	EMI FILTER		
EF3006	NQR0504-001X	EMI FILTER		
K3001	NQR0413-003X	FERRITE BEADS		
K3191	NQR0413-003X	FERRITE BEADS		
K3192	NQR0413-003X	FERRITE BEADS		
K3193	NQR0413-003X	FERRITE BEADS		
K3194	NQR0413-003X	FERRITE BEADS		
K3195	NQR0413-003X	FERRITE BEADS		
K3196	NQR0413-003X	FERRITE BEADS		
K3291	NQR0413-003X	FERRITE BEADS		
K3292	NQR0413-003X	FERRITE BEADS		
K3293	NQR0413-003X	FERRITE BEADS		
K3294	NQR0413-003X	FERRITE BEADS		
K3295	NQR0413-003X	FERRITE BEADS		
K3296	NQR0413-003X	FERRITE BEADS		
K3391	NQR0413-003X	FERRITE BEADS		
K3392	NQR0413-003X	FERRITE BEADS		
K3393	NQR0413-003X	FERRITE BEADS		
K3394	NQR0413-003X	FERRITE BEADS		
K3395	NQR0413-003X	FERRITE BEADS		
K3396	NQR0413-003X	FERRITE BEADS		
K3701	NQR0413-003X	FERRITE BEADS		
K3741	NQR0413-003X	FERRITE BEADS		
K3742	NQR0413-003X	FERRITE BEADS		
K3743	NQR0413-003X	FERRITE BEADS		
K3744	NQR0413-003X	FERRITE BEADS		
K3861	NQR0413-003X	FERRITE BEADS		
K3891	NQR0413-003X	FERRITE BEADS		
K3893	NQR0413-003X	FERRITE BEADS		
K3894	NQR0413-003X	FERRITE BEADS		
X3201	NAX0673-001X	CRYSTAL	14.3181MHz	
X3701	NAX0781-001X	CRYSTAL	40.0000MHz	

SECTION 1
PRECAUTION

Please refer to "HD-52G786, HD-52G886 and HD-56G786 (No.YA293)" about this section.

SECTION 2
SPECIFIC SERVICE INSTRUCTIONS

Please refer to "HD-52G786, HD-52G886 and HD-56G786 (No.YA293)" about this section.

SECTION 3
DISASSEMBLY

Please refer to "HD-52G786, HD-52G886 and HD-56G786 (No.YA293)" about this section.

SECTION 4
ADJUSTMENT

Please refer to "HD-52G786, HD-52G886 and HD-56G786 (No.YA293)" about this section.

SECTION 5
TROUBLESHOOTING

Please refer to "HD-52G786, HD-52G886 and HD-56G786 (No.YA293)" about this section.

JVC
Victor Company of Japan, Limited
ILA Display Category 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

(No.YA293E)

Printed in Japan
VPT

REAR PROJECTION TELEVISION

No.YA293C
2006/01

HD-52G786/Q,
HD-52G886/Q,
HD-56G786/Q,
HD-56G886/Q

Supplementary

HD-52G786/Q, HD-52G886/Q, HD-56G786/Q and HD-56G886/Q are the models whose production place of PWB ASS'Y was changed based on HD-52G786/B, HD-52G886/B, HD-56G786/B and HD-56G886/B.Therefore, this service manual describes only the items which differ from those of the HD-52G786/B, HD-52G886/B, HD-56G786/B, HD-56G886/B service manual.For details other than those described in this manual, please refer to the HD-52G786/B, HD-52G886/B, HD-56G786/B, HD-56G886/B service manual (No.YA293B, 2006/1).

HOW TO IDENTIFY MODELS

"QA" is added at the bottom of the Rating label.

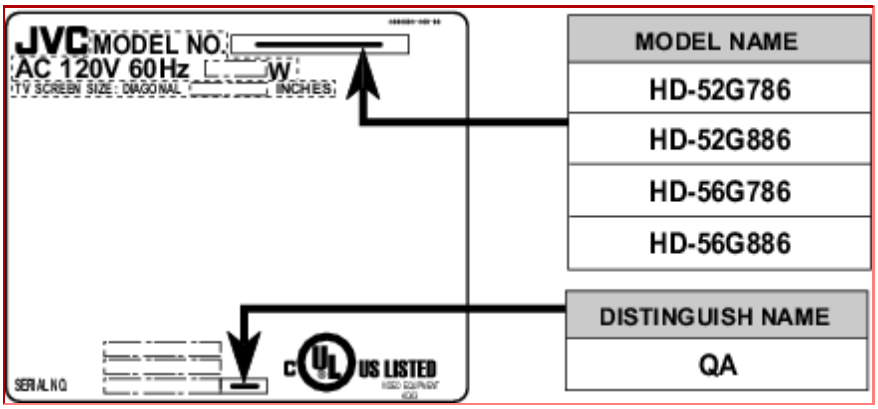

DIFFERENCE LIST

USING P.W. BOARD

P.W.B ASS'Y Name	HD-52G786/B	HD-52G786/Q	DESCRIPTION
MAIN DRIVE PWB	SRP-3011A-M2	SRP-3014A-M2	Refer to PARTS LIST.
FAN CONTROL PWB	SRP-8109A-M2	SRP-8107A-M2	Change only in PWB ASS'Y No.
TEMP SENSOR PWB	SRP-8209A-M2	SRP-8207A-M2	Refer to DIFFERENCE LIST.
DIGITAL SIGNAL PWB	SRP0D037A-M2	SRP0D037A-M3	Change only in PWB ASS'Y No.

P.W.B ASS'Y Name	HD-52G886/B HD-56G786/B	HD-52G886/Q HD-56G786/Q	DESCRIPTION
MAIN DRIVE PWB	SRP-3011A-M2	SRP-3014A-M2	Refer to PARTS LIST.
FAN CONTROL PWB	SRP-8109A-M2	SRP-8107A-M2	Change only in PWB ASS'Y No.
TEMP SENSOR PWB	SRP-8209A-M2	SRP-8207A-M2	Refer to DIFFERENCE LIST.

EXPLODED VIEW PARTS LIST-3

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B	HD-52G786/Q		
⚠	204	SRP0D037A-M2	SRP0D037A-M3	DIGITAL SIGNAL PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G886/B	HD-56G886/Q		
	81	QUQ105-4013AE-E	QUQL05-4013AE-E	FFC WIRE	40pin 13cm

EXPLODED VIEW PARTS LIST-4

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B HD-56G786/B	HD-52G786/Q HD-52G886/Q HD-56G786/Q		
	145	LC12230-001A	LC12229-001A	PJ LENS UNIT	
⚠	211	SRP-8209A-M2	SRP-8207A-M2	TEMP SENSOR PWB	
⚠	212	SRP-3011A-M2	SRP-3014A-M2	MAIN DRIVE PWB	
⚠	213	SRP-8109A-M2	SRP-8107A-M2	FAN CONTROL PWB	

PRINTED WIRING BOARD PARTS LIST

TEMP SENSOR P.W. BOARD ASS'Y

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B HD-56G786/B	HD-52G786/Q HD-52G886/Q HD-56G786/Q		
		SRP-8209A-M2	SRP-8207A-M2		
	IC2001	LM75BIM-5-X	LM75CIM-5-X		

PACKING PARTS LIST

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786/B HD-52G886/B	HD-52G786/Q HD-52G886/Q		
	3	LC12060-002B-A	---	PAD	Delete
	5	LC12060-001B-A	---	PAD	Delete
	7	CP30055-007-A	---	SET COVER	Delete
	8	CP30055-A02-A	---	SET COVER	Delete

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786/B	HD-56G786/B		
	1	LC12428-001A-A	LC12428-001B-A	PACKING CASE	
	3	LC12426-001A-A	---	PAD	Delete
	5	LC12426-001A-A	---	PAD	Delete
	7	CP30055-007-A	---	SET COVER	Delete
	8	CP30055-A02-A	---	SET COVER	Delete

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G886/B	HD-56G886/B		
	3	LC12426-001A-A	---	PAD	Delete
	5	LC12426-001A-A	---	PAD	Delete
	7	CP30055-007-A	---	SET COVER	Delete
	8	CP30055-A02-A	---	SET COVER	Delete

FIND PARTS (undefined) ALL BLOCK SCH PCB EXPLODED PARTS LIST

VOLTAGE

Name

E-mail

OK Cancel

Folder Browse...

OK Cancel

Folder/URL Browse...

OK Cancel

OK Add Favorite Import...

J-POST

E-mail to

Account Code

User ID

Password

Ship-to

Folder Browse...

JASPER

E-mail to

User ID

Password

OK Cancel

REAR PROJECTION TELEVISION

No.YA293B
2006/1

HD-52G786/B,HD-52G886/B, HD-56G786/B,HD-56G886/B

Supplementary

The following items for the HD-52G786/B, HD-52G886/B, HD-56G786/B and HD-56G886/B were changed partly from HD-52G786, HD-52G886, HD-56G786 and HD-56G886.Therefore, this service manual describes only the items which differ from those of the HD-52G786, HD-52G886, HD-56G786 and HD-56G886 service manual.For details other than those described in this manual, please refer to the HD-52G786, HD-52G886, HD-56G786 and HD-56G886 service manual (No.YA293, 2005/7).

HOW TO IDENTIFY MODELS

"BA" is added at the bottom of the Rating label.

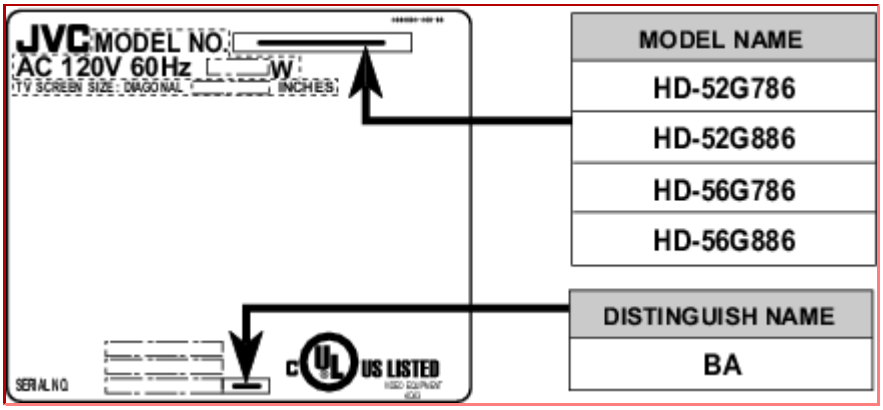

DIFFERENCE LIST

USING P.W. BOARD (Page 3-3)

P.W.B ASS'Y Name	HD-52G786	HD-52G786/B	DESCRIPTION
REGULATOR PWB	SRP-2023A-M2	SRP-2026A-M2	
MAIN DRIVE PWB	SRP-3008A-M2	SRP-3011A-M2	
FAN CONTROL PWB	SRP-8107A-M2	SRP-8109A-M2	
TEMP SENSOR PWB	SRP-8207A-M2	SRP-8209A-M2	
POWER PWB	SRP-9022A-M2	SRP-9026A-M2	
DIGITAL SIGNAL PWB	SRP0D026A-M2	SRP0D037A-M2	
P.W.B ASS'Y Name	**HD-52G886**	**HD-52G886/B**	**DESCRIPTION**
REGULATOR PWB	SRP-2023A-M2	SRP-2026A-M2	
MAIN DRIVE PWB	SRP-3008A-M2	SRP-3011A-M2	
FAN CONTROL PWB	SRP-8107A-M2	SRP-8109A-M2	
TEMP SENSOR PWB	SRP-8207A-M2	SRP-8209A-M2	
POWER PWB	SRP-9022A-M2	SRP-9026A-M2	
DIGITAL SIGNAL PWB	SRP0D027A-M2	SRP0D038A-M3	
P.W.B ASS'Y Name	**HD-56G786**	**HD-56G786/B**	**DESCRIPTION**
REGULATOR PWB	SRP-2023A-M2	SRP-2026A-M2	
MAIN DRIVE PWB	SRP-3008A-M2	SRP-3011A-M2	

FAN CONTROL PWB	SRP-8107A-M2	SRP-8109A-M2	
TEMP SENSOR PWB	SRP-8207A-M2	SRP-8209A-M2	
POWER PWB	SRP-9022A-M2	SRP-9026A-M2	
DIGITAL SIGNAL PWB	SRP0D024A-M2	SRP0D035A-M3	

P.W.B ASS'Y Name	HD-56G886	HD-56G886/B	DESCRIPTION
REGULATOR PWB	SRP-2023A-M2	SRP-2026A-M2	
MAIN DRIVE PWB	SRP-3008A-M2	SRP-3011A-M2	
FAN CONTROL PWB	SRP-8107A-M2	SRP-8109A-M2	
TEMP SENSOR PWB	SRP-8207A-M2	SRP-8209A-M2	
POWER PWB	SRP-9022A-M2	SRP-9026A-M2	
DIGITAL SIGNAL PWB	SRP0D025A-M2	SRP0D036A-M3	

EXPLODED VIEW PARTS LIST-3 (Page 3-8)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786	HD-52G786/B		
	85	WJZ0152-002A-E	WJZ0176-001A-E	E-HARNESS ASSY	"FL"/"SW"/"FJ"
	94	LC33157-001A-A	---	RATING LABEL	Not supply
⚠	204	SRP0D026A-M2	SRP0D037A-M2	DIGITAL SIGNAL PWB	
⚠	205	SRP-2023A-M2	SRP-2026A-M2	REGULATOR PWB	
⚠	209	SRP-9022A-M2	SRP-9026A-M2	POWER PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G886	HD-52G886/B		
	85	WJZ0152-002A-E	WJZ0176-001A-E	E-HARNESS ASSY	"FL"/"SW"/"FJ"
	94	LC33157-001A-A	---	RATING LABEL	Not supply
⚠	204	SRP0D027A-M2	SRP0D038A-M3	DIGITAL SIGNAL PWB	
⚠	205	SRP-2023A-M2	SRP-2026A-M2	REGULATOR PWB	
⚠	209	SRP-9022A-M2	SRP-9026A-M2	POWER PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786	HD-56G786/B		
	85	WJZ0152-002A-E	WJZ0176-001A-E	E-HARNESS ASSY	"FL"/"SW"/"FJ"
	94	LC33157-001A-A	---	RATING LABEL	Not supply
⚠	204	SRP0D024A-M2	SRP0D035A-M3	DIGITAL SIGNAL PWB	
⚠	205	SRP-2023A-M2	SRP-2026A-M2	REGULATOR PWB	
⚠	209	SRP-9022A-M2	SRP-9026A-M2	POWER PWB	

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G886	HD-56G886/B		
	85	WJZ0152-002A-E	WJZ0176-001A-E	E-HARNESS ASSY	"FL"/"SW"/"FJ"
	94	LC33157-001A-A	---	RATING LABEL	Not supply
⚠	204	SRP0D025A-M2	SRP0D036A-M3	DIGITAL SIGNAL PWB	
⚠	205	SRP-2023A-M2	SRP-2026A-M2	REGULATOR PWB	
⚠	209	SRP-9022A-M2	SRP-9026A-M2	POWER PWB	

EXPLODED VIEW PARTS LIST-4 (Page 3-10)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786 HD-52G886 HD-56G786	HD-52G786/B HD-52G886/B HD-56G786/B		

		HD-56G886	HD-56G886/B		
⚠	121	TS-COP7A-SAA	TS-COP7D-SAA	OPTICAL/DRIVE ASSY	Inc.D-ILA DEVICE/MAIN DRIVE PWB/PJ LENS UNIT
⚠	129	QAL0676-001	QAL0765-001	LAMP BALLAST UNIT	
⚠	211	SRP-8207A-M2	SRP-8209A-M2	TEMP SENSOR PWB	
⚠	212	SRP-3008A-M2	SRP-3011A-M2	MAIN DRIVE PWB	
⚠	213	SRP-8107A-M2	SRP-8109A-M2	FAN CONTROL PWB	

PRINTED WIRING BOARD PARTS LIST
REGULATOR P.W. BOARD ASS'Y (Page 3-14)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786 HD-52G886 HD-56G786 HD-56G886	HD-52G786/B HD-52G886/B HD-56G786/B HD-56G886/B		
		SRP-2023A-M2	SRP-2026A-M2		
	IC2702	BA50BC0FP-X	---	IC	Delete
	D2001	D1FS4-X	SK14-GA-X	SB DIODE	
	D2002	MA111-X	1SS355-X	SI DIODE	
	D2401	MA111-X	1SS355-X	SI DIODE	
	D2701	MA8051/M/-X	---	Z DIODE	Delete
	D2801	MA111-X	1SS355-X	SI DIODE	
	D2802	MA8051/M/-X	UDZS5.1B-X	Z DIODE	
	D2803	MA111-X	1SS355-X	SI DIODE	
	D2804	MA111-X	1SS355-X	SI DIODE	
	D2805	MA111-X	1SS355-X	SI DIODE	
	D2806	MA8051/M/-X	UDZS5.1B-X	Z DIODE	
	D2807	MA111-X	1SS355-X	SI DIODE	
	D2808	MA111-X	1SS355-X	SI DIODE	
	D2809	MA111-X	1SS355-X	SI DIODE	
	D2905	---	UTCTL431-T	IC	Addition
	C2703	QETN1EM-107Z	---	E CAPACITOR	Delete
	C2704	QETN1CM-107Z	---	E CAPACITOR	Delete
	C2910	---	QETN1HM-106Z	E CAPACITOR	10uF 50V M
	R2701	NRSA63J-101X	---	MG RESISTOR	Delete
	R2702	NRSA63J-101X	---	MG RESISTOR	Delete
	R2703	NRSA63J-123X	---	MG RESISTOR	Delete
	R2704	NRSA63J-103X	---	MG RESISTOR	Delete
	R2917	---	NRS12BJ-471W	MG RESISTOR	470Ω 1/2W J
	R2918	---	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D
	R2919	---	NRSA63D-472X	MG RESISTOR	4.7kΩ 1/16W D
	R2920	---	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
	R2921	---	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J
	R2922	---	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J

DIGITAL SIGNAL P.W. BOARD ASS'Y (Page 3-21)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G786	HD-52G786/B		
		SRP0D026A-M2	SRP0D037A-M2		
	D2101	MA111-X	1SS355-X	SI DIODE	
	D2103	MA111-X	1SS355-X	SI DIODE	
	D7001	MA111-X	1SS355-X	SI DIODE	
	D7003	MA111-X	1SS355-X	SI DIODE	
	D7203	MA111-X	1SS355-X	SI DIODE	
	D7204	MA111-X	1SS355-X	SI DIODE	
	D7601	MA111-X	1SS355-X	SI DIODE	

DIGITAL SIGNAL P.W. BOARD ASS'Y (Page 3-31)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-52G886	HD-52G886/B		
		SRP0D027A-M2	SRP0D038A-M3		
	D2101	MA111-X	1SS355-X	SI DIODE	
	D2103	MA111-X	1SS355-X	SI DIODE	
	D7001	MA111-X	1SS355-X	SI DIODE	
	D7003	MA111-X	1SS355-X	SI DIODE	
	D7203	MA111-X	1SS355-X	SI DIODE	
	D7204	MA111-X	1SS355-X	SI DIODE	
	D7601	MA111-X	1SS355-X	SI DIODE	

DIGITAL SIGNAL P.W. BOARD ASS'Y (Page 3-38)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G786	HD-56G786/B		
		SRP0D024A-M2	SRP0D035A-M3		
	D2101	MA111-X	1SS355-X	SI DIODE	
	D2103	MA111-X	1SS355-X	SI DIODE	
	D7001	MA111-X	1SS355-X	SI DIODE	
	D7003	MA111-X	1SS355-X	SI DIODE	
	D7203	MA111-X	1SS355-X	SI DIODE	
	D7204	MA111-X	1SS355-X	SI DIODE	
	D7601	MA111-X	1SS355-X	SI DIODE	

DIGITAL SIGNAL P.W. BOARD ASS'Y (Page 3-45)

⚠	Ref. No.	Part No.		PART NAME	DESCRIPTION
		HD-56G886	HD-56G886/B		
		SRP0D025A-M2	SRP0D036A-M3		
	D2101	MA111-X	1SS355-X	SI DIODE	
	D2103	MA111-X	1SS355-X	SI DIODE	
	D7001	MA111-X	1SS355-X	SI DIODE	
	D7003	MA111-X	1SS355-X	SI DIODE	
	D7203	MA111-X	1SS355-X	SI DIODE	
	D7204	MA111-X	1SS355-X	SI DIODE	
	D7601	MA111-X	1SS355-X	SI DIODE	

FIND PARTS (undefined) ALL BLOCK SCH PCB EXPLODED PARTS LIST
VOLTAGE

Name

E-mail

OK Cancel

Folder Browse...

OK Cancel

Folder/URL Browse...

OK Cancel

OK Add Favorite Import...

J-POST

E-mail to

Account Code

User ID

Password

Ship-to

Folder Browse...

JASPER

E-mail to

User ID

Password

OK Cancel